


11. After you made these settings, loosen the strings again and remove the sound hole pickup.
12. Remove strap nut, washer, and hexagon nut from the endpin and put the endpin with the connected cable through the sound hole into the guitar.
13. Adjust the endpin by using the inside nut so the larger threads end just inside the guitar.

ATTENTION: The larger thread has to be 0.5mm inside the frame of your guitar (see fig. 3). Put the washer from the outside on the thread, tighten the hexagon nut by means of a wrench and screw strap nut on.

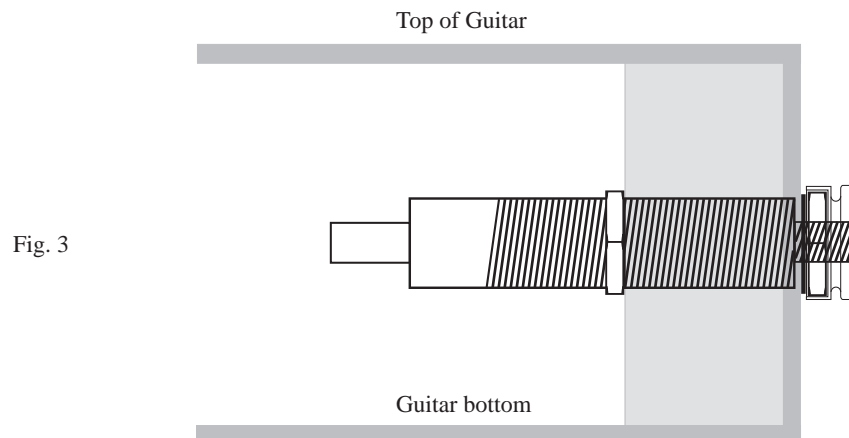

14. Remove the tape from the pickup-cable-holder and stick it on the inside of the guitar to avoid cable noises.
15. Put a 9V battery into the battery holder and connect it.
16. Install the pickup into the sound hole by loosening the screws, place the holder under the top of the guitar and tighten the screws.
17. Tune your guitar.
18. The battery turns on automatically, as soon as you plug guitar cable into the endpin. To spare the battery life, take the cable out when you are finished.